

Welcome

Welcome to the DISH Network TV Everywhere Trial

In this trial, you'll be able to watch & control your DISH DVR and watch all your great DISH programming anywhere.

- Around the house
- At the coffee shop
- Or on vacation




Your input will help us make decisions. So, look for a survey by email in the next couple days.

To get started, you need:

- A computer running a 32-bit version of Microsoft Windows XP, Windows Vista, or Windows 7
- Slingbox SOLO
- DISH Network TV2 IR Converter Kit
- SlingLink TURBO units, if your network router is too far for a network cable
- DISH Network ViP Receiver 622/722/722k

Also, please make sure your ViP Receiver is set to dual mode for this installation.


MODE



*If your receiver is not set to dual mode, you can change this by pressing the MODE button hidden behind the right door on the front of your receiver.


1. Connect your Slingbox

Connect a composite video cable from the ViP Receiver TV2 video output to the Video IN of the Slingbox SOLO.

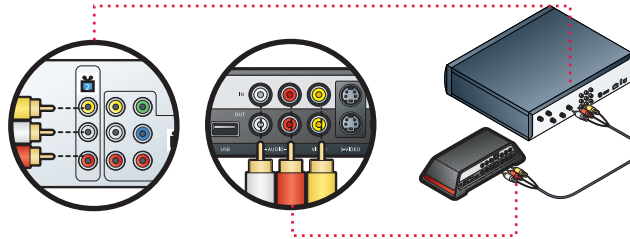


2. Set up the TV2 IR Converter

Connect the IR cable between Slingbox SOLO IR port and the EXT-IR port on the TV2 IR Converter.

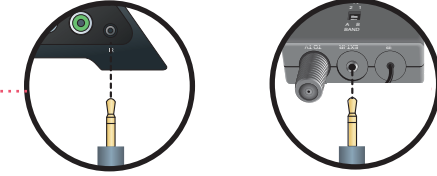

Connect the Receiver port on the TV2 IR Converter to the ViP Receiver Remote Antenna port (GREEN) using a coax cable. If you had to remove your Remote Antenna to do this, replace using the Two-Way Splitter according to diagram below.

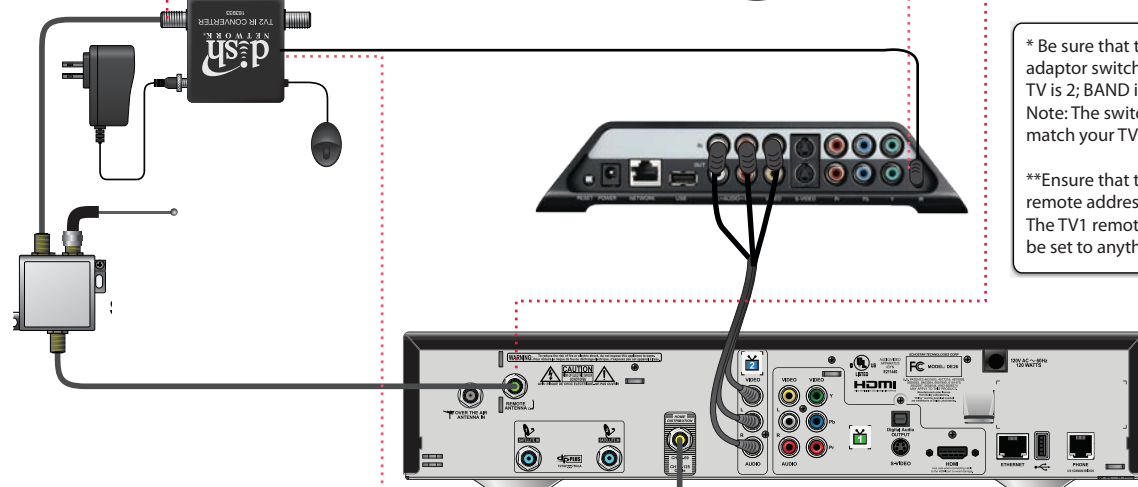


* Be sure that the UHF/IR adaptor switches are correct: TV is 2; BAND is A.
Note: The switches must match your TV2 remote.

**Ensure that the TV2 UHF remote address is set to 1.
The TV1 remote address must be set to anything but 1.

3. Connect to your network router


If your ViP Receiver, your Slingbox SOLO, and your network router are close enough together, use a network cable to connect the ViP Receiver and the Slingbox SOLO to your router. Proceed to step 4.

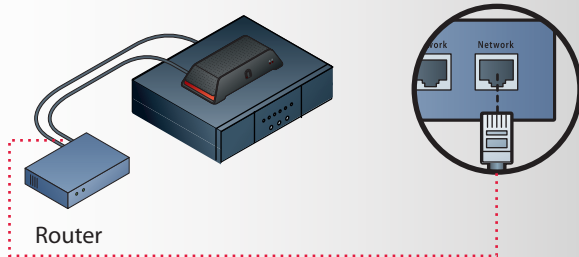


- OR -

If your network router is too far from the ViP Receiver and the Slingbox SOLO for a network cable:

- Connect a network cable from the ViP Receiver ETHERNET port to an available NETWORK port on the 4-port (larger) SlingLink TURBO unit.
- Connect another network cable from the NETWORK port on the Slingbox SOLO to another available NETWORK port on the 4-port (larger) SlingLink TURBO unit.
- Plug the 4-port SlingLink TURBO unit directly into a wall outlet. Do not plug the SlingLink TURBO unit into a power strip.

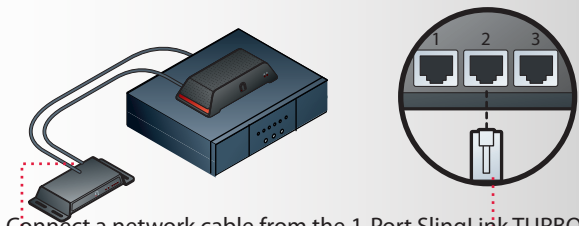

- Connect a network cable from the 1-Port SlingLink TURBO unit into your network router and connect the 1-Port SlingLink unit directly into a wall outlet.

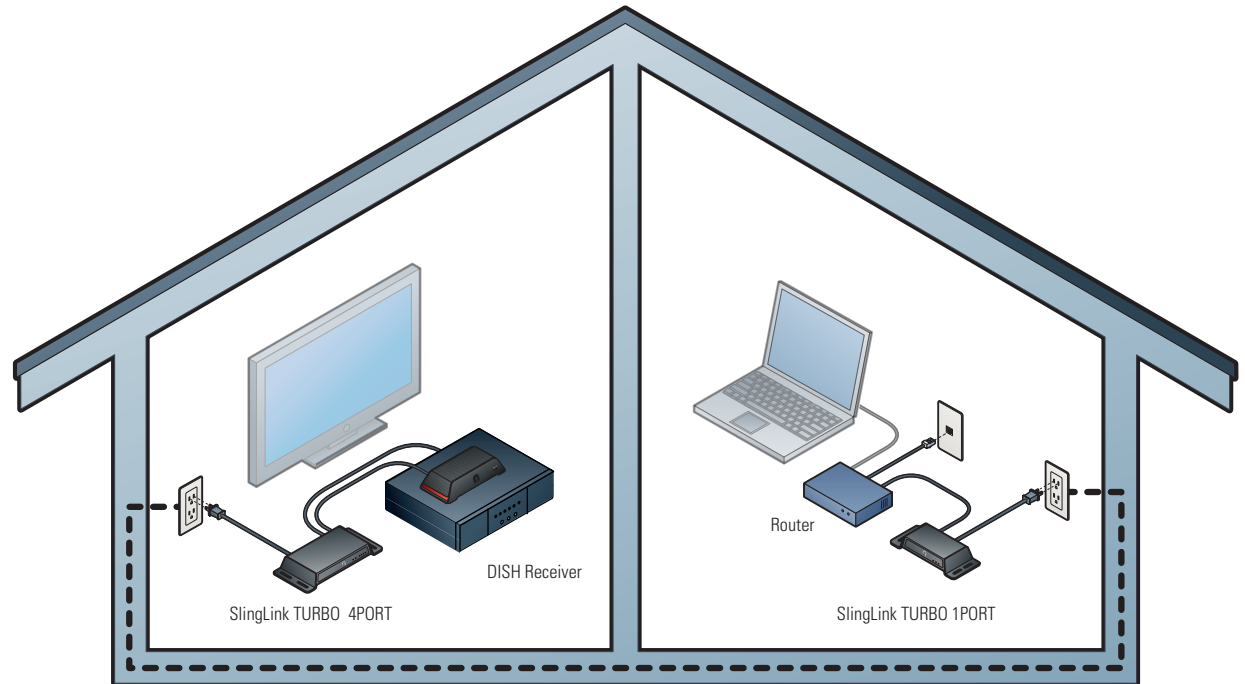

Optional setup if using SlingLinks to connect your ViP Receiver and Slingbox to network router in another room.

4. Get online and set up your Slingbox

Using a Windows computer connected to the same network as the Slingbox SOLO, open a web browser* and navigate to <http://dish.slingbox.com> and click Set Up Your Slingbox.

*Supported browsers: Microsoft Internet Explorer 7 or later; Firefox 3.0 or later.



You'll be watching your Dish TV Everywhere in no time!

Support



1-877-GO-SLING

And please mention you are part of the DISH Network TV Everywhere Trial!